

Mobilram TM 18/22 HD

Specifications:

Height up to rapid change device max.	mm	25300
Underground lowering depth	mm	2400
Height extended	mm	28000
Prestressing force	kN	120
Extraction force	kN	200
Torque absorption	daNm	12000
Load capacity	kg	12000
Lifting capacity service winch	kN	50
Leader inclination front/rear max.	deg	4/5
Leader inclination laterally max.	deg	4
Leader slewing range max.	deg	90
Weight of piling equipment without attach depending on carrier unit	ton	72-75

Base carrier: SR 50 T


Engine power CAT C18	kW	570
----------------------	----	-----

Transport dimensions:

Length	mm	15970
Width	mm	3100
Height	mm	3700

Optional:

Telescopic lower	mm	2300-3700
------------------	----	-----------

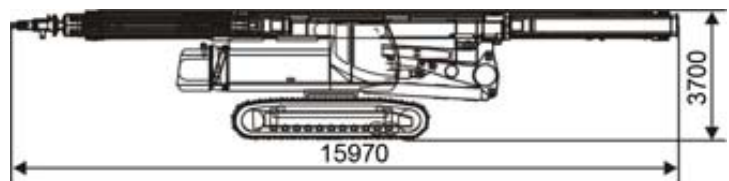

We reserve the right to change technical specifications without prior notice.
